

# DSE2548

## DSENET® OUTPUT EXPANSION MODULE

The DSE2548 is an LED expansion module that can be used with all DSENet® compatible control modules. The module has been designed to display a maximum of eight individual LED indications up to a maximum distance of 1 KM (0.6miles).

The DSE2548 is presented in a vertical enclosure. It includes an alarm sounder that is triggered when the host controller detects an alarm condition. The alarm can be muted directly from the DSE2548 using the front push button.

The DSE2548 includes individual LEDs for each channel and a 'Power On' LED that flashes when the link with the host controller is lost.

### ENVIRONMENTAL TESTING STANDARDS

#### ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2  
EMC Generic Immunity Standard for the Industrial Environment  
BS EN 61000-6-4  
EMC Generic Emission Standard for the Industrial Environment

#### ELECTRICAL SAFETY

BS EN 60950  
Safety of Information Technology Equipment, including Electrical Business Equipment

#### TEMPERATURE

BS EN 60068-2-1  
Ab/Ae Cold Test -30 °C  
BS EN 60068-2-2  
Bb/Be Dry Heat +70 °C

#### VIBRATION

BS EN 60068-2-6  
Ten sweeps in each of three major axes  
5 Hz to 8 Hz @ +/-7.5 mm,  
8 Hz to 500 Hz @ 2 gn

#### HUMIDITY

BS EN 60068-2-30  
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours  
BS EN 60068-2-78  
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours


#### SHOCK

BS EN 60068-2-27  
Three shocks in each of three major axes  
15 gn in 11 mS

#### DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529  
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

## COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

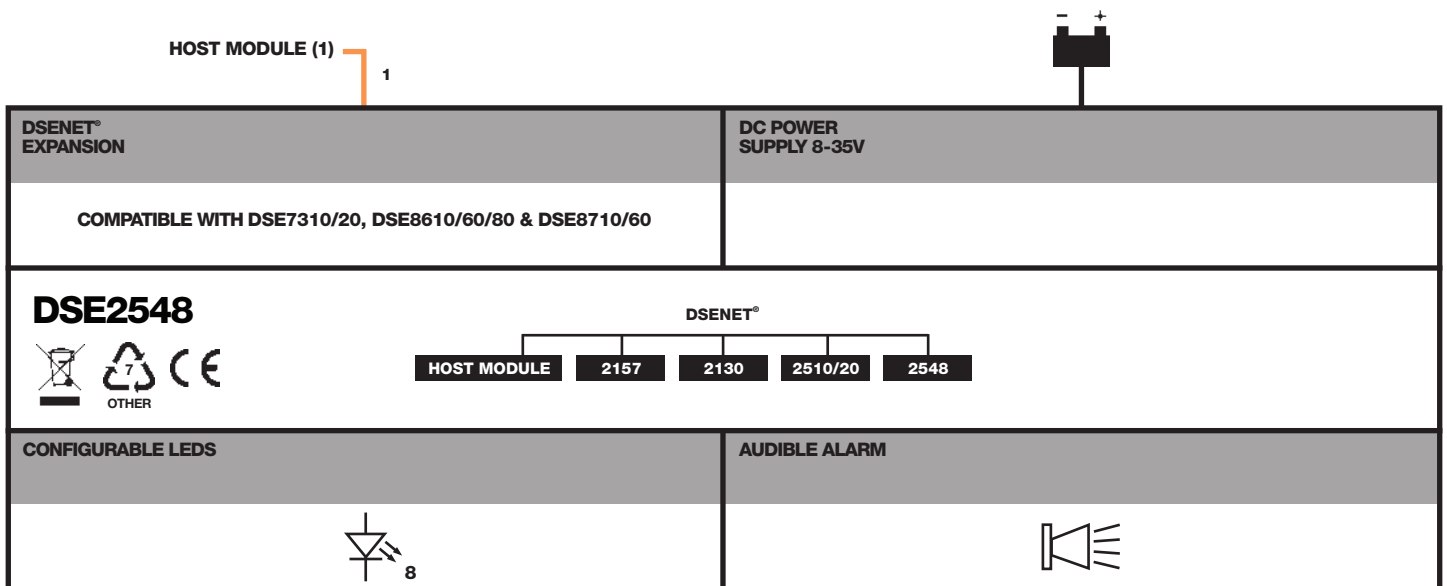

# DSE2548

## DSENET<sup>®</sup> OUTPUT EXPANSION MODULE



### KEY FEATURES

- Eight configurable LEDs
- Works up to 1 KM (0.6 miles) from the host controller
- 10 modules can be linked together to one host controller

### ID SWITCH

The rotary ID switch is used to select the address of the DSE2548 expansion module, as the host control module is capable of giving instructions to a number of DSE2548 expansion modules at the same time.

### SPECIFICATION

**DC SUPPLY**  
**CONTINUOUS VOLTAGE RATING**  
 8 V to 35 V Continuous

**CRANKING DROPOUTS**  
 Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

**MAXIMUM OPERATING CURRENT**  
 112 mA at 12 V, 53 mA at 24 V

**MAXIMUM STANDBY CURRENT**  
 74 mA at 12 V, 35 mA at 24 V

**DIMENSIONS**  
**OVERALL**  
 180 mm x 116 mm x 42.7 mm  
 7.07" x 4.57" x 1.68"

**PANEL CUT-OUT**  
 154 mm x 98 mm  
 6.06" x 3.86"

**MAXIMUM PANEL THICKNESS**  
 8 mm  
 0.3"

### RELATED MATERIALS

**TITLE**  
 DSE2548 Installation Instructions  
 DSE2548 Operator Manual

**PART NO'S**  
 053-032  
 057-084

### DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH  
**TELEPHONE** +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303  
**EMAIL** sales@deepseapl.com **WEBSITE** www.deepseapl.com

### DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA  
**TELEPHONE** +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708  
**EMAIL** sales@deepseausa.com **WEBSITE** www.deepseausa.com